
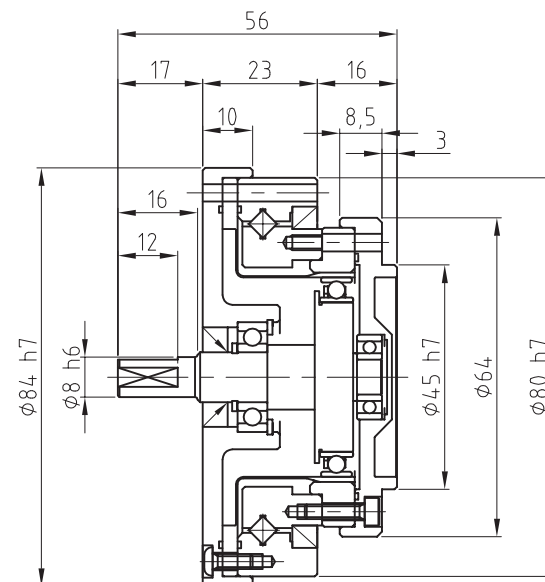
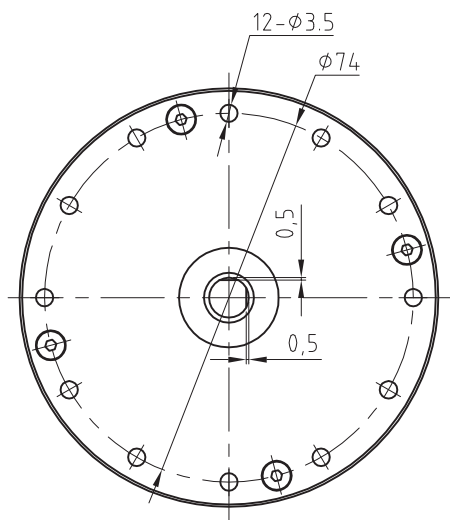


No keyway

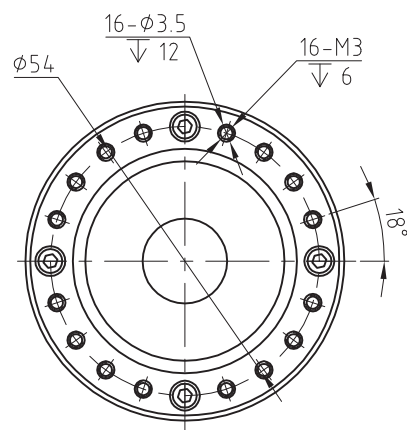

Laifual Drive

LHT-17-XX-U-IV

Technical Requirements:

1. Please use the grease specified by our company (LF-2 or F-3).
2. The * in the drawing is the installation reference size, please follow the installation size requirements.
3. For details of size, please confirm with the delivery specification drawings.

| Model | Reduction ratio | Rated torque at 2000r/min input | | Permissible peak torque at start and stop | | Permissible maximum value for average load | | Permissible maximum momentary torque | | Permissible maximum input rotational speed (Grease) | Permissible average input rotational speed (Grease) | Backlash | weight | Desian life |
|-------|-----------------|---------------------------------|------|---|------|--|------|--------------------------------------|------|---|---|----------|-------------|-------------|
| | | Nm | kgfm | Nm | kgfm | Nm | kgfm | Nm | kgfm | r/min | r/min | Arc Sec | kg | Hour |
| 17 | 50 | 16 | 1.6 | 34 | 3.5 | 26 | 2.6 | 70 | 7.1 | 7300 | 3500 | ≤20 | LHT-IV:0.90 | 10000 |
| | 80 | 22 | 2.2 | 43 | 4.4 | 27 | 2.7 | 87 | 8.9 | | | | | 15000 |
| | 100 | 24 | 2.4 | 54 | 5.5 | 39 | 4.0 | 110 | 11 | | | | | 15000 |
| | 120 | 24 | 2.4 | 54 | 5.5 | 39 | 4.0 | 86 | 8.8 | | | | | 15000 |