
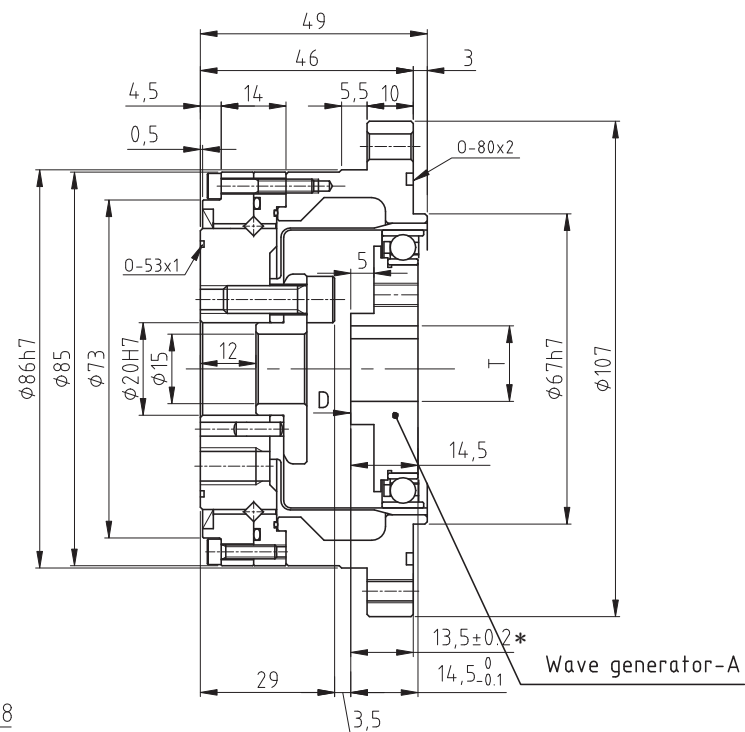


D 向

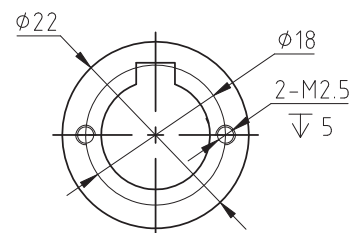

Technical Requirements:

1. Please use the grease specified by our company (LF-2 or F-3).
2. The * in the drawing is the installation reference size, please follow the installation size requirements.
3. For details of size, please confirm with the delivery specification drawings.

| LSSF-25-XX-U-I | | | | Model | Reduction ratio | Rated torque at 2000r/min input | | Permissible peak torque at start and stop | | Permissible maximum value for average load | | Permissible maximum momentary torque | | Permissible maximum input rotational speed (Grease) | Permissible average input rotational speed (Grease) | Backlash | weight | Desian life | |
|----------------------|--|-------|-----------------------------------|---------|-----------------|---------------------------------|----|---|-----|--|-----|--------------------------------------|-----|---|---|----------|---------|-------------|-------|
| MODEL | | U | T | | | W | Nm | kgfm | Nm | kgfm | Nm | kgfm | Nm | kgfm | r/min | r/min | Arc Sec | kg | Hour |
| | | | | | | | | | | | | | | | | | | | |
| Wave generator-A φ11 | | φ11H7 | 12.8 ^{+0.1} ₀ | 4JS9/P9 | 25 | 50 | 39 | 4.0 | 98 | 10 | 55 | 5.6 | 186 | 19 | 5600 | 3500 | ≤20 | LSSF-I:1.46 | 10000 |
| | | | | | | 80 | 63 | 6.4 | 137 | 14 | 87 | 8.9 | 255 | 26 | | | | | 15000 |
| Wave generator-A φ14 | | φ14H7 | 16.3 ^{+0.1} ₀ | 5JS9/P9 | | 100 | 67 | 6.8 | 157 | 16 | 108 | 11 | 284 | 29 | | | | | 15000 |
| | | | | | | 120 | 67 | 6.8 | 167 | 17 | 108 | 11 | 304 | 31 | | | | | 15000 |